





Disassembling HP Envy 17-3070NR Motherboard Assembly

Prerequisite Only guide for accessing motherboard.

Written By: Jasper Lewin



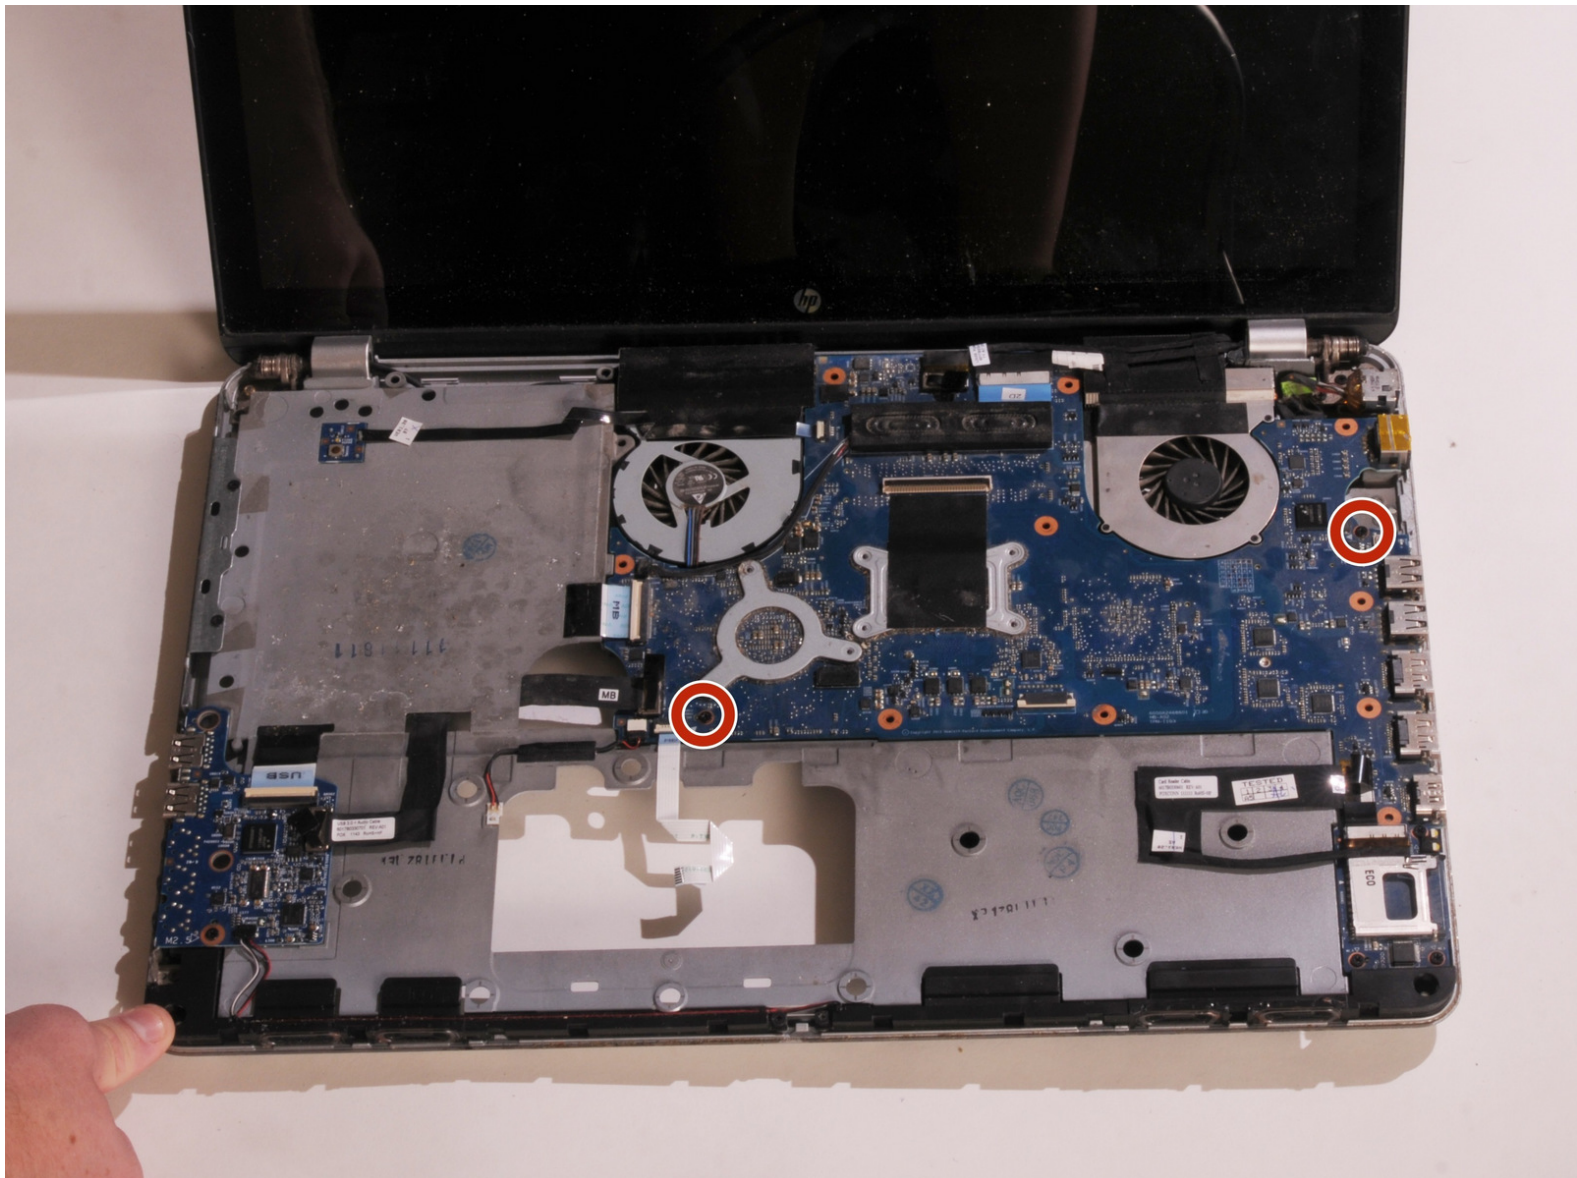


Step 1 — Motherboard Assembly

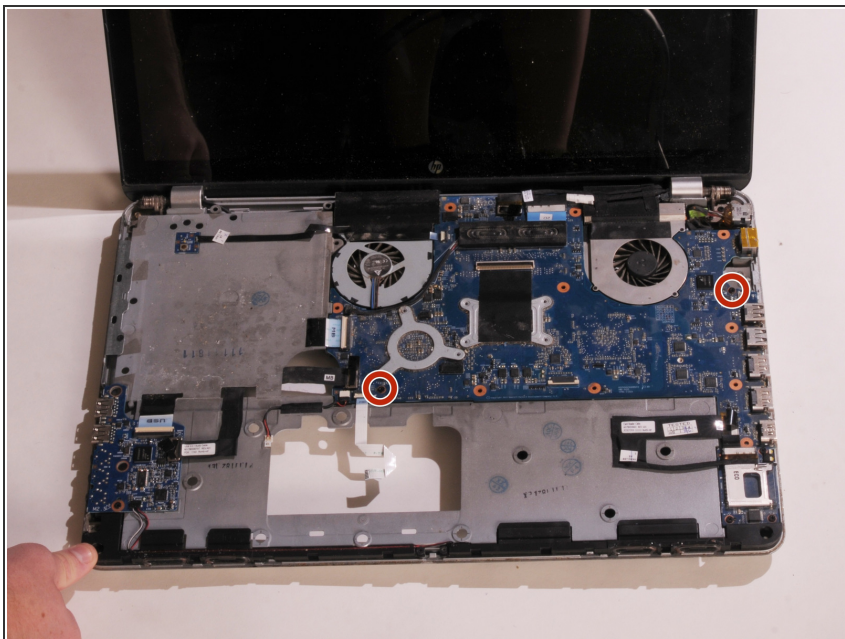




- Remove the two 4.5mm Phillips screws from the system board

Step 2

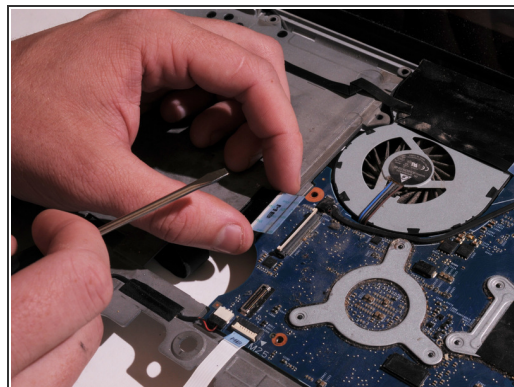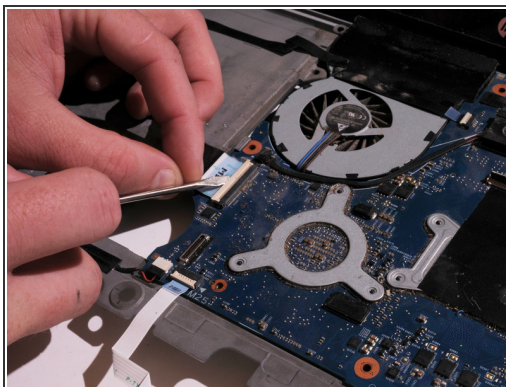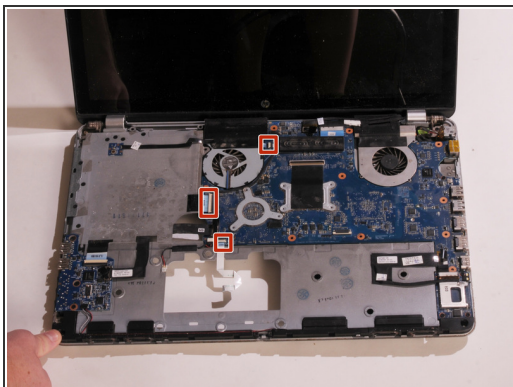



- Disconnect three cables by lifting a white clamp with a Flathead screwdriver and pulling on the blue tab.

Step 3

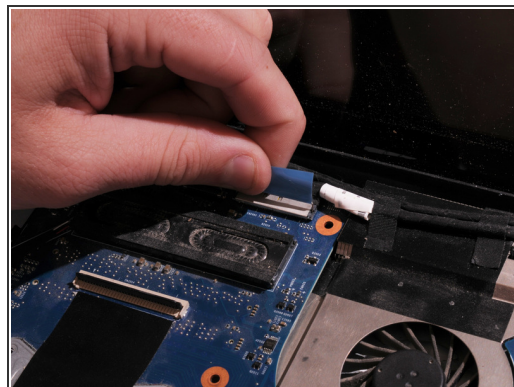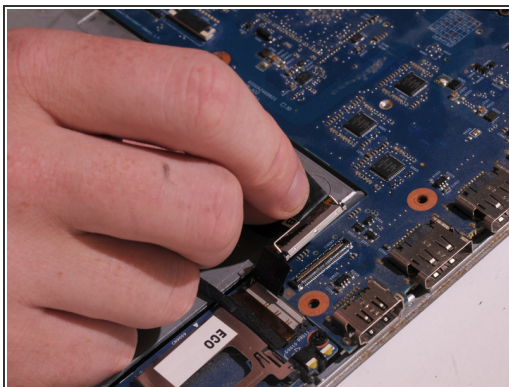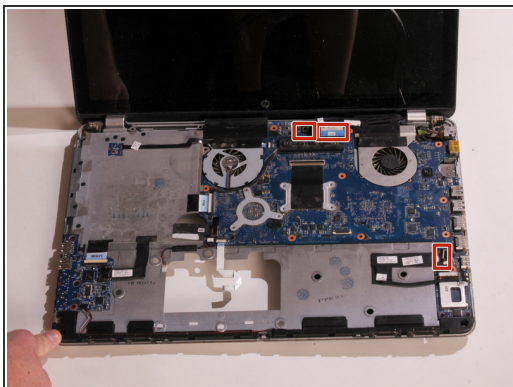


- Disconnect three cables by pulling upward on black or blue tabs connected to them.

Step 4

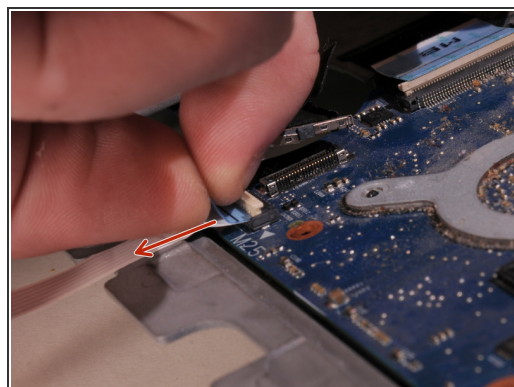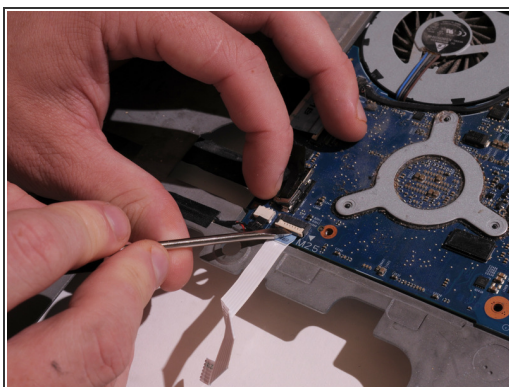


- Disconnect cable by using a Flathead screwdriver to gently pry it off the black connector towards you.

Step 5

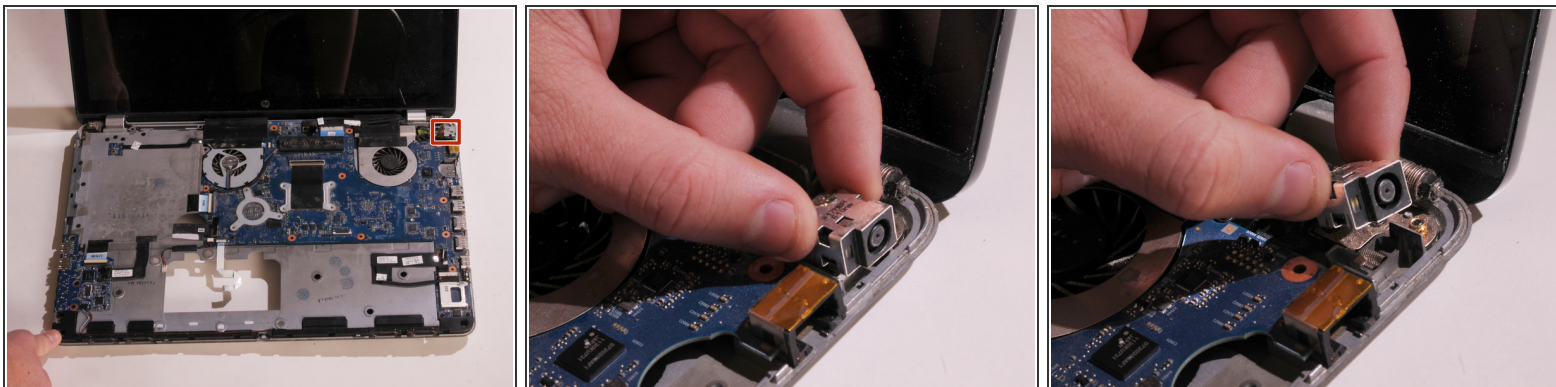

- Lift up the power connector from the clip.

Step 6

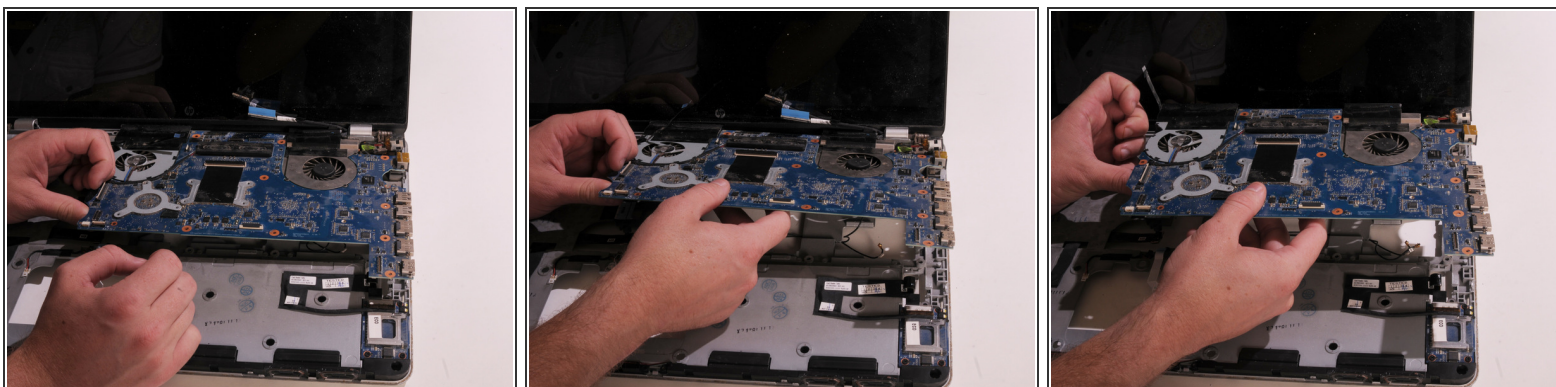

- Carefully lift up motherboard from the main assembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-31 07:26:06 PM.